



The Pau Lope Company LLC


www.PauLope.com

The
PAU LOPE® COLLECTION...*Is Here*

“ Considered the World’s Finest Hardwood Decking ”

Nothing Measures Up to PAU LOPE®

Pau Lope® Brand Decking is considered the World’s Finest Hardwood Decking, bar none, for as high-graded, defect-restricted, low-moisture-content, and well-packaged of a Hardwood Decking choice that is available on today’s market.

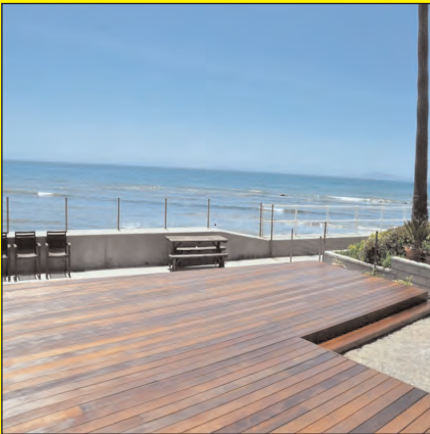

Several Hardwood Species Choices
The Highest Quality Grade
The Dryest Moisture Content
The Best Packaging
Legally Harvested and Verified
Stewardship-Friendly Compliant
30-Year Limited Warranty





Nothing Measures Up to PAU LOPE®

Pau Lope® Decking is sawn, graded, kiln dried and packaged as =

- All Heart All Sides, No Sap, Sap is rejected.
- Extensively Clear One Face and Two Edges.
- Face & Edge Milling Defects rejected i.e. skip, hit 'n miss, snipe.
- Kiln Dried to 16% MC max, or less.
- Dead-Stack-Packed, to prevent sticker stain.
- Protected Units, to prevent outside dirt and moisture.

The Pau Lope® Collection					
	Pau Lope® IPE'	Pau Lope® Red Balau	Pau Lope® Massaranduba	Pau Lope® Cumaru	Pau Lope® Garapa
Marketing Name	Brazilian Walnut	Batu - Red Mahogany	Brazilian Redwood	Peruvian Teak	Golden Ash
Scientific Name	Handroanthus spp.	Shorea spp.	Manilkara Bidentata	Dipteryx Odorata	Apiuleia Leicarpa
Origin	Brazil	Asia	Brazil	Peru Brazil	Brazil Bolivia
Color	Olive Brown	Reddish Brown	Reddish Brown	Orange Tan Brown	Honey Gold
Moisture Content Max	KD 16	KD 14	KD 14	KD 14	KD 14
Specific Gravity	.85 to .97	.65	.85	.80 to .91	.75
Modulus of Elasticity	3140k PSI	1650k PSI	3450k PSI	3030k PSI	1835k PSI
Bending Strength	22560 PSI	20670 PDI	27280 PSI	27270 PSI	12900 PSI
Crushing Strength	10350 PSI	10050 PSI	11640 PSI	13720 PSI	N/A
Janka Hardness	3060 LBS	1640 LBS	3190 LBS	3540 Lbs	1631 LBS
Radial Shrinkage	6.6%	6.2%	6.3%	5.0%	4.4%
Tangential Shrink	8.0%	11.4%	8.0%	3.0%	8.5%
Durability	Very	Moderate	Very	Very	Medium
Movement in Service	Low	Moderate	Low to Medium	Low to Medium	Low to Medium
Maintenance	Low	Medium	Low	Low	Low to Medium
1" x Deck OCs 100 PSF	24"	16"	24"	24"	16"
5/4" Deck OCs 100 PSF	32"	24"	32"	32"	24"

